

EZ-ON[®] SERIES


N95 PARTICULATE RESPIRATOR



EZ 22



EZ 23

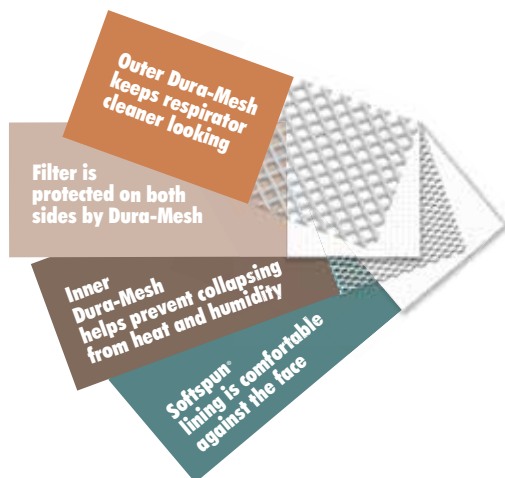

Outer Dura-Mesh keeps respirator cleaner looking

Filter is protected on both sides by Dura-Mesh

Inner Dura-Mesh helps prevent collapsing from heat and humidity

Softspun[®] lining is comfortable against the face

EASY ON, EASY OFF

The first and only NIOSH N95 approved one adjustable cotton strap respirator gives you a quick fit. The single strap with Flexwing[®] and head harness provides an easier and more comfortable fit than two straps. The adjustable cotton strap is cool and comfortable against the skin.

EASY FIT, MORE COMFORT

The molded nose bridge with soft foam nose cushion provides the wearer an easy comfortable fit. There's no metal noseband to adjust and the seal is maintained without pressure points.

STAY COOL ON THE JOB

Workers stay cooler with an exhale valve (EZ 23S model only) that reduces hot air build up. There's less breathing resistance and workers don't have to break midshift to cool off.

DURA-MESH[®] SHELL LASTS LONGER

The exclusive Dura-Mesh shell protects the filter media so it stays cleaner-looking longer. The shell also resists collapsing in hot, humid environments so the respirator holds its shape longer. The result is fewer respirators used and lower costs.

FEATURES

- The first and only NIOSH N95 approved one adjustable cotton strap respirator.
- Easy on, easy off one strap design for a quick fit.
- Single strap with Flexwing and head harness provides an easier and more comfortable fit than two straps.
- Exhale valve (EZ 23S model only) lets workers breathe easy and stay cool.
- Dura-Mesh shell resists collapsing in heat and humidity.
- Molded nose bridge seals easily without a metal noseband.
- Facepiece is naturally contoured without pressure points.
- Straps are securely attached so they don't break at the seal.
- Softspun[®] lining for increased comfort and durability.
- Soft foam nose cushion for added comfort.
- Meets heat and flame resistance in accordance with ANSI/ISEA 110-2009 Section 7.11.1.
- Ventex[®] valve lets workers breathe easy and stay cool.
- Available in two sizes.
- 100% PVC-Free for a greener alternative.

N95 APPLICATIONS:

Grinding, Torch Cutting, Sanding, Metal Pouring, Sweeping, Metal Working, Bagging, Foundries, Stone Quarrying, Agriculture, Metal Machining, Construction Sites, Cement, Ceramics Manufacturing, Underground Mining, Timber/Lumber Mills, Polishing, Buffing, Lime, Poultry, Textiles, Welding, Brazing, Soldering.

EZ-ON SERIES

N95 PARTICULATE RESPIRATOR

Product Code	Size	Valve Type	Strap Material	Display Quantity	Case Quantity
EZ 22	M/L	None	Cloth	10/Bag	20 Bags
EZ 22S	S	None	Cloth	10/Bag	20 Bags
EZ 23	M/L	Ventex	Cloth	10/Bag	10 Bags
EZ 23S	S	Ventex	Cloth	10/Bag	10 Bags

Product Code	NSN Number
EZ 22 M/L	4240-01-512-1270
EZ 22S S	4240-01-512-1262

WARNING TO USER

- Follow all instructions and warnings on the use of this respirator and wear during all times of exposure. Failure to do so will reduce respirator effectiveness, wearer protection and may result in sickness or death.
- Before use, the user must first be trained by the employer in proper respirator use, in accordance with applicable safety and health standards, for the contaminant and exposure level in the assigned work area.
- The particulates and other contaminants which can be dangerous to your health include those which you cannot see, taste, or smell.
- This product has not been sold with warnings or use instructions for personnel involved in healthcare or related situations, where there may be the possibility of contact with disease or biological hazards. If you are considering such uses, first call the Moldex Technical Service Department: +1 (800) 421-0668 or +1 (310) 837-6500 ext. 512/550.

LIMITED WARRANTY IMPORTANT NOTICE TO PURCHASER

This limited warranty is made in lieu of the warranties of merchantability, fitness for particular purposes and all other warranties, express or implied. There are no other warranties which extend beyond the description on the face hereof. The physical standards and specifications of Moldex will be met by products sold. Exclusive Remedies: damages for the breach of this limited warranty are limited to the replacement of such quantity of Moldex, products proved to be defectively manufactured. Except as provided above, Moldex shall not be liable or responsible for any loss, damage, or liability, direct, indirect, incidental, special, or consequential, arising out of sale, use, or misuse, or the inability to use products by the user.


MOLDEX TECHNICAL ASSISTANCE

For more information call +1 (800) 421-0668 or +1 (310) 837-6500 ext. 512/550 or E-mail: sales@moldex.com, tech@moldex.com or visit www.moldex.com.




MOLDEX-METRIC, INC.
 10111 Jefferson Blvd.
 Culver City, CA 90232
 TEL: +1 (800) 421-0668 or
 +1 (310) 837-6500
 FAX: +1 (310) 837-9563
 E-mail: sales@moldex.com
 www.moldex.com

CANADIAN CUSTOMER SERVICE
 Tel: +1 (800) 421-0668, Ext. 550/512
 Fax: +1 (310) 837-9563



Moldex-Metric, Inc.
 CULVER CITY, CALIFORNIA, 90232
 +1 (800) 421-0668



THESE RESPIRATORS ARE APPROVED ONLY IN THE FOLLOWING CONFIGURATIONS:

TC*	PROTECTION†	RESPIRATOR					CAUTIONS AND LIMITATIONS‡
		E	N	S	N	N	
84A-3743	N95	X	X				A B C J M N O P
84A-3846	N95			X	X		A B C J M N O P

- Protection**
 N95-Particulate Filter (95% filter efficiency level) effective against particulate aerosols free of oil; time use restrictions may apply
- Cautions and Limitations**
 - A- Not for use in atmospheres containing less than 19.5 percent oxygen.
 - B- Not for use in atmospheres immediately dangerous to life or health.
 - C- Do not exceed maximum use concentrations established by regulatory standards.
 - J- Failure to properly use and maintain this product could result in injury or death.
 - M- All approved respirators shall be selected, fitted, used, and maintained in accordance with MSHA, OSHA, and other applicable regulations.
 - N- Never substitute, modify, add, or omit parts. Use only exact replacement parts in the configuration as specified by the manufacturer.
 - O- Refer to User's Instructions, and/or maintenance manuals for information on use and maintenance of these respirators.
 - P- NIOSH does not evaluate respirators as surgical masks.

USE AGAINST:

- Particulate aerosols free of oil.

DO NOT USE AGAINST:

- Concentrations of contaminants which are unknown, or are immediately dangerous to life or health.
- Concentrations of particulates which exceed the maximum use concentration or 10 times the OSHA Permissible Exposure Limit, whichever is lower.
- Gases, vapors, asbestos, paint spray, sandblasting or particulate materials which generate harmful vapors.
- Oil-based mists.

RESTRICTIONS

- This respirator does not supply oxygen and must not be used in atmospheres containing less than 19.5% oxygen.
- Do not remain in contaminated area if any physical distress occurs, for example breathing difficulty, dizziness or nausea.
- Leave contaminated area and replace respirator if it is damaged, distorted, a proper fit can not be obtained or breathing becomes difficult.
- Prior to each use, carefully inspect the entire respirator, including filter media and strap/weld attachment area for tears and damage. Staple or strap/weld attachment perforations do not affect respirator performance.
- Do not alter, modify, or abuse this respirator.
- Store unused respirators in box/bag in a clean, dry, non-contaminated area.
- Dispose of respirator according to your employer's policy and local regulations.
- Dispose no later than thirty days after first use.
- Use respirator before the "use by" expiration date printed on box/bag.
- If used for welding, wear appropriate eye and face protection.

DISTRIBUTED BY:



Printed on Recycled Paper